


LIVERPOOL SPLASH BACKS

How to Measure for your Glass Splashback

BASIC SQUARE / RECTANGULAR SHAPE

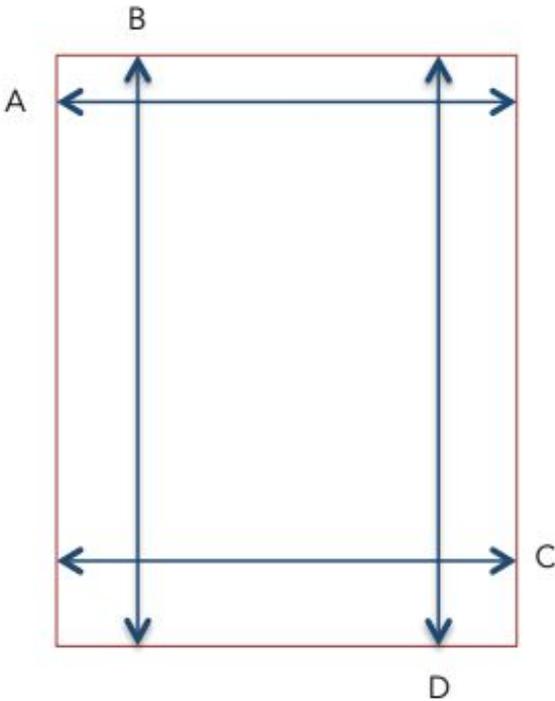

Most splashbacks will require two simple measurements, A & B, However, we suggest you **measure all four distances (A, B, C & D)** to see if there is any significant discrepancy.

If there are differences you have two options:

(Option 1):


If they are minor (less than 3mm) simply enter the shorter measurements into Step 2 when ordering.

(Option 2):

If you want the splashback to fit perfectly than firstly enter the shorter measurements into step 2 of our order form to get your quote. If you wish to proceed then simply send us your actual measurements and we will cut the splashback to fit your space.

Note: Please allow 3mm off all measurements. The glass industry works to a tolerance of +/- 2mm so this ensures the glass will fit. Any slight gaps can be filled with sealant.

SOCKET CUT-OUTS

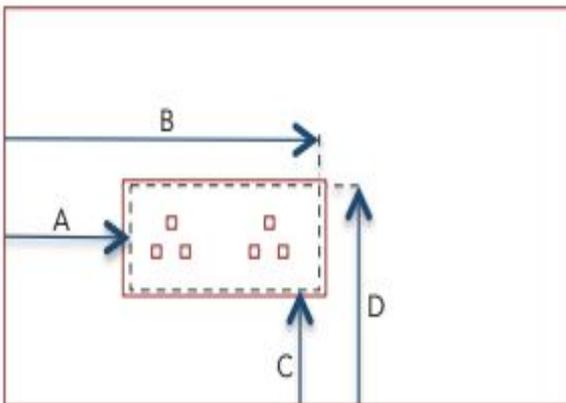

Measure distances A, B, C, D:

- A & B from the nearest wall
- C & D from the worktop surface

Notes: these measurements are inside the area of the socket so that the socket fits over the top of the glass for a professional finish. These measurements should be 4mm inside the socket area.


If you prefer the glass to fit round the edges of the socket then adjust the measurements accordingly to fit 4mm outside the socket area. Any gaps can be filled with sealant.

There must be a minimum of 20mm of glass between each cutout.

There must be a minimum of 50mm of glass between any socket cutout and the edge of the splashback.

LIVERPOOL SPLASH BACKS

T-SHAPE

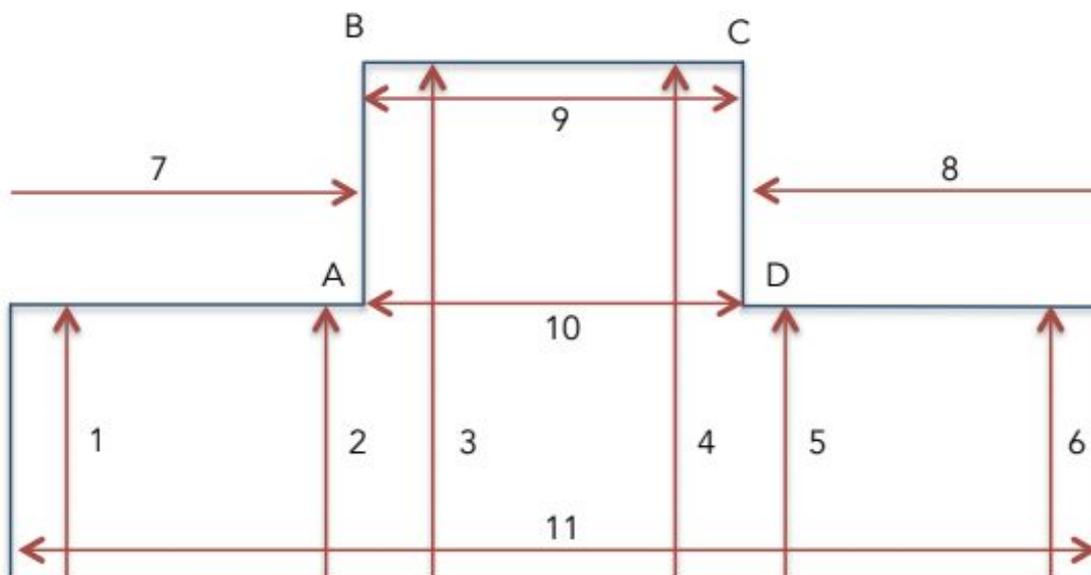

Take multiple measurements 1 - 11

Take the shorter measurement of each section of the splashback and enter this into the calculator.

If there are significant differences you have two options:

(Option 1): If they are minor (less than 3mm) simply take the shorter measurement and send this to us.

(Option 2): If you want the splashback to fit perfectly send us the full list of measurements or draw a sketch.

Ensure you leave the correct amount of space for the corners A, B, C & D that will be fitting around wall units and cooker hoods. We recommend you leave a gap of 6-8mm between the glass and units to ensure a correct fit.

Please allow 3mm off all other measurements. The glass industry works to a tolerance of +/- 2mm so this ensures the glass will fit. Any slight gaps can be filled with sealant.

OTHER SHAPES

If you require a glass splashbacks that is not a standard-cut shape, we can tailor the order to your specific requirements. Please contact us to discuss your project in more detail.

LIVERPOOL SPLASH BACKS

SENDING YOUR MEASUREMENTS

Upon ordering you can choose how to send us your measurements:

(Option 1) UPLOAD IMAGE:

You can simply draw a sketch with the correct measurements and upload this at the point of order.

(Option 2) E-MAIL MEASUREMENTS:

Once your order is complete, you will receive a unique order reference number, simply e-mail us your measurements quoting your reference number and we will confirm once we have received them.

Please send measurements to: sales@lgs-uk.com

(Option 3) SEND A TEMPLATE:

You can send us an exact Template of your splashback and we will cut your glass to size, please make sure the template is Plywood only and send to our production unit (there is an additional £25.00 charge for this service)

**Unit 3 Rowehill Business Centre,
Lees Road, Knowsley Industrial Estate,
Kirkby
L33 7AA**

ADDITIONAL INFORMATION

Remember, toughened glass splashbacks cannot be cut on site so it is vital that you send us accurate measurements with the required adjustments for material expansion. We will supply the splashbacks based on the measurements you take and cannot be responsible for glass that does not fit correctly.

These instructions have been compiled as a guide only.

If you have any questions please do not hesitate to contact our customer service team:

sales@lgs-uk.com